



ATTACCHI RAPIDI


TIPO F





TIPO B

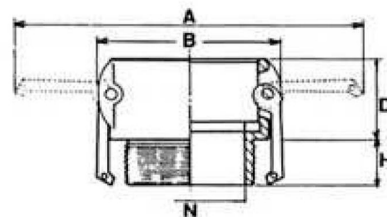


TIPO E




TIPO C




TIPO A




TIPO D



TIPO DP



TIPO DC



PRESSIONI: da 1/2" a 2" = 40 bar da 3" a 4" = 20 bar da 5" a 6" = 14 bar 8" = 10 bar

Misura	A	B	C	D	E	F	G	H	K	L	M	N	O	P	R	S	T	U	V	Z
1/2"	117	62	40	32	15	32	34	18	18	43	28	15	28	10	8	16	-	-	-	-
3/4"	117	62	40	32	19	34	34	18	18	51	33	20	28	14	8	21	19	32	13	27
1"	137	66	48	40	24	40	40	24	20	57	44	24	36	20	10	26	24	37	15	33
1+1/4"	184	82	56	50	28	46	50	24	22	58	52	30	42	25	10	34	29	45	16	45
1+1/2"	191	92	56	50	36	55	57	24	24	61	54	40	47	32	10	42	37	53	18	43
2"	200	99	62	54	46	70	72	26	24	71	58	50	53	42	11	52	46	63	20	49
2+1/2"	213	126	74	56	58	83	86	32	26	81	61	60	53	56	11	68	55	76	20	51
3"	254	138	74	58	72	98	103	32	30	100	66	75	53	66	11	80	73	92	20	51
4"	279	169	75	60	100	124	130	32	30	110	67	90	53	93	11	103	98	120	20	54
5"	306	198	79	69	120	158	160	32	34	125	77	113	59	113	15	130	122	146	25	54
6"	416	265	89	69	150	197	187	40	40	145	78	146	60	141	15	152	148	176	25	60
8"	514	300	120	102	193	256	235	48	45	190	104	193	125	186	15	204	-	-	-	-

Guarnizione in NBR - Temperatura max 100 °C
Guarnizione in EPDM - Temperatura max 110 °C
Guarnizione in SILICONE - Temperatura max 140 °C

Guarnizione in VITON - Temperatura max 250 °C
Guarnizione in PTFE+EPDM - Temperatura max 110 °C